


下载应用程序：（MacOS-11.X.X 版本以上英特尔和 M1 通用）

http://192.144.220.147:9000/ssh_proxy/Proxifier-Mac-v3.7.dmg


如你的 Mac 操作系统为 10.X.X 版，请使用如下版本

http://192.144.220.147:9000/ssh_proxy/Proxifier-Mac-v226-os10.dmg

安装应用

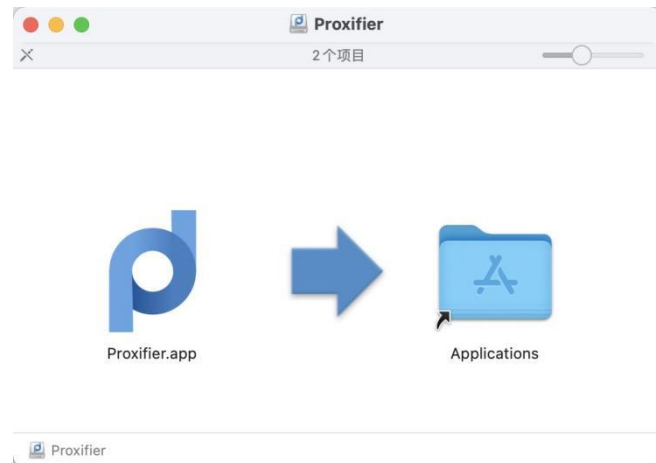


打开应用

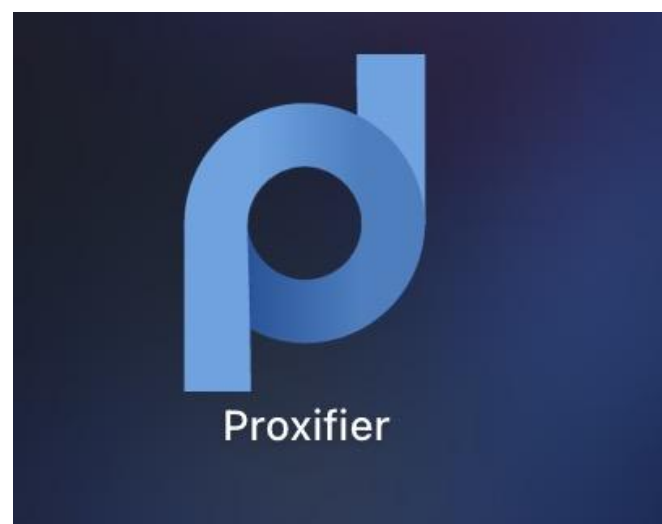


选择打开




选择企业注册 key

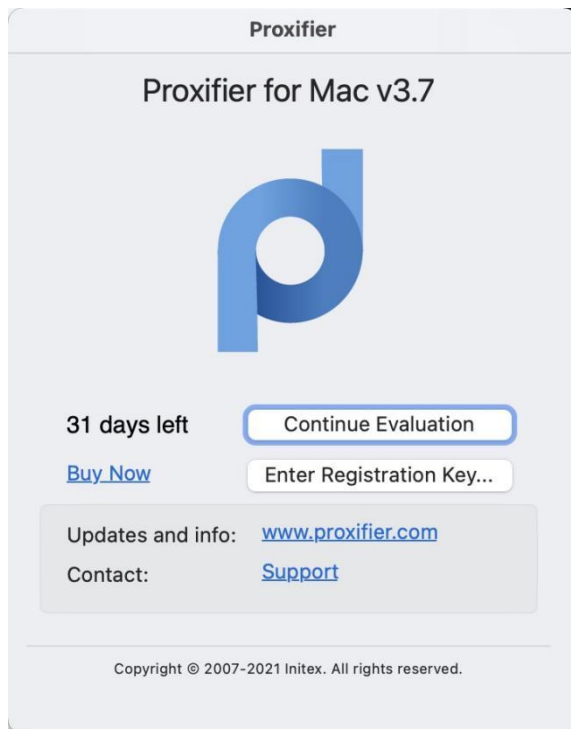

名称随便，激活密钥为 **3CWNN-WYTP4-SD83W-ASDFR-84KEA**

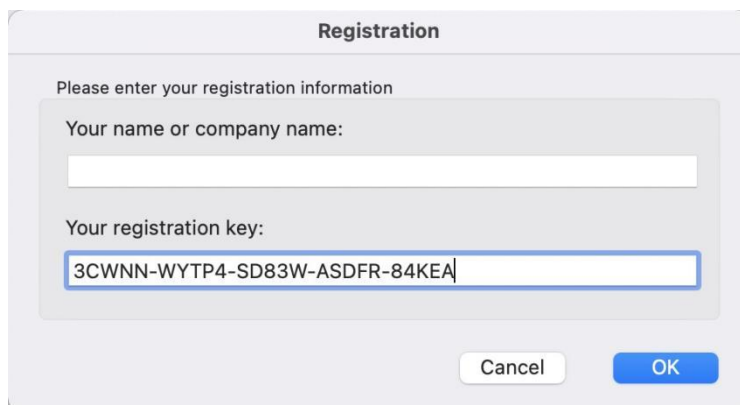

如下提示，注册成功

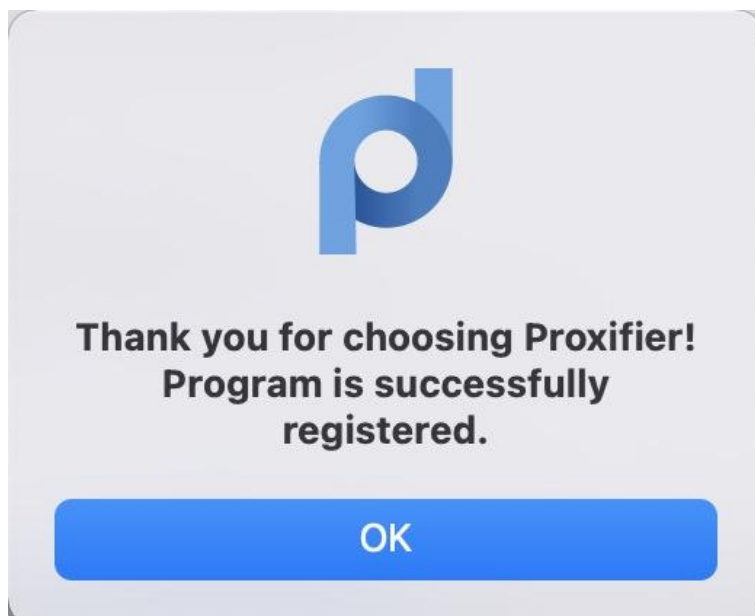


差了一步没有截图，点按解锁按钮进行解锁，然后选择允许




选择允许



选择如下图所示 proxies

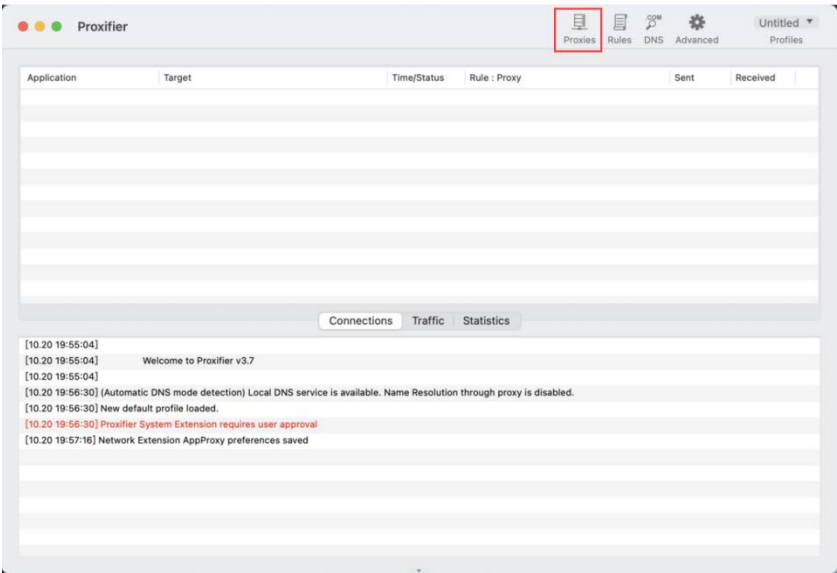

选择 Add... 进行添加

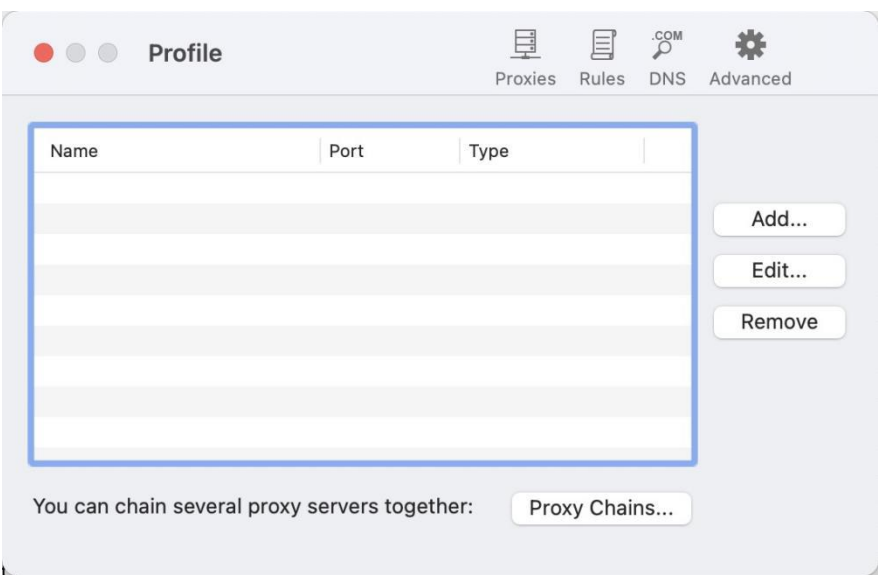

Address=49.232.50.234


Port=9013

选择 SOCKS Version 5

勾选 Enable


输入管理员给你分配的账号密码

选择 Save

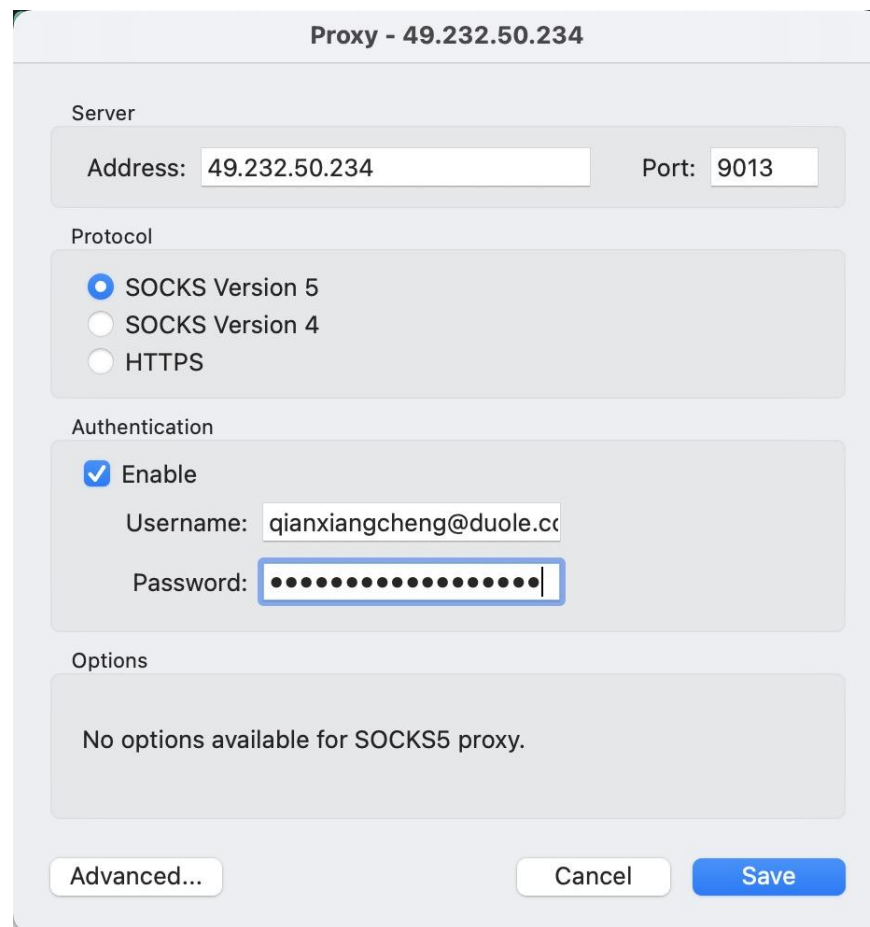


The image shows a 'Proxy - 49.232.50.234' configuration window. It has several sections: 'Server' with fields for 'Address' (49.232.50.234) and 'Port' (9013); 'Protocol' with radio buttons for 'SOCKS Version 5' (selected), 'SOCKS Version 4', and 'HTTPS'; 'Authentication' with a checked 'Enable' checkbox, a 'Username' field (qianxiangcheng@duole.cc), and a 'Password' field (masked with dots); and 'Options' with the text 'No options available for SOCKS5 proxy.' At the bottom are buttons for 'Advanced...', 'Cancel', and 'Save'.

如下图选择 No

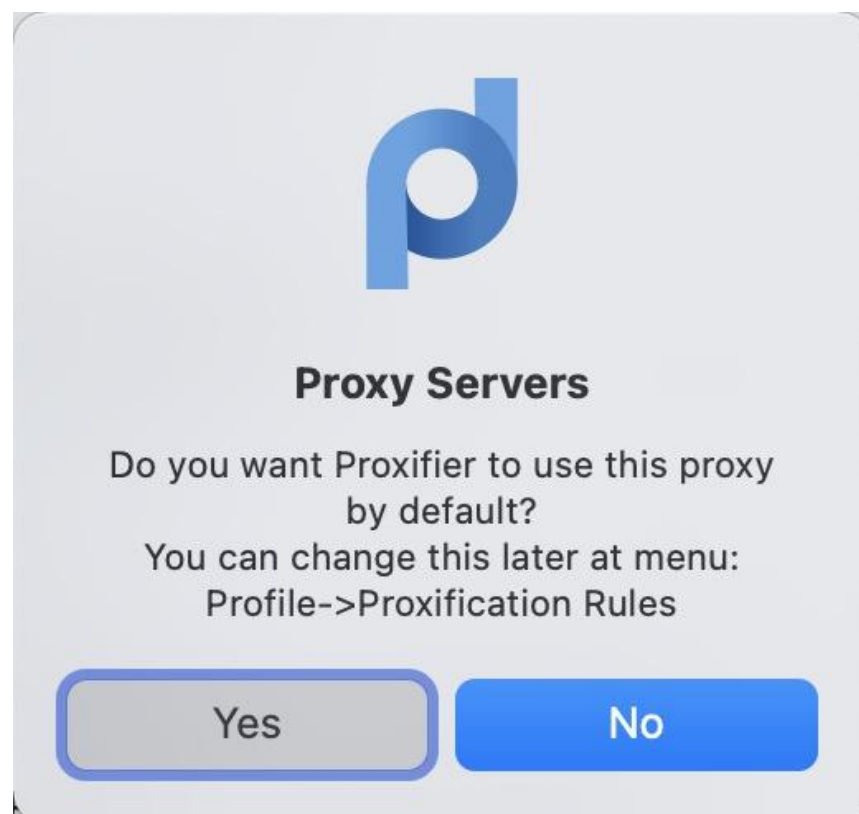


The image shows a 'Proxy Servers' dialog box with the Proxifier logo at the top. The text asks: 'Do you want Proxifier to use this proxy by default?' and 'You can change this later at menu: Profile->Proxification Rules'. At the bottom are two buttons: 'Yes' and 'No'. The 'No' button is highlighted with a blue border and is the intended selection.


继续选择 Rules

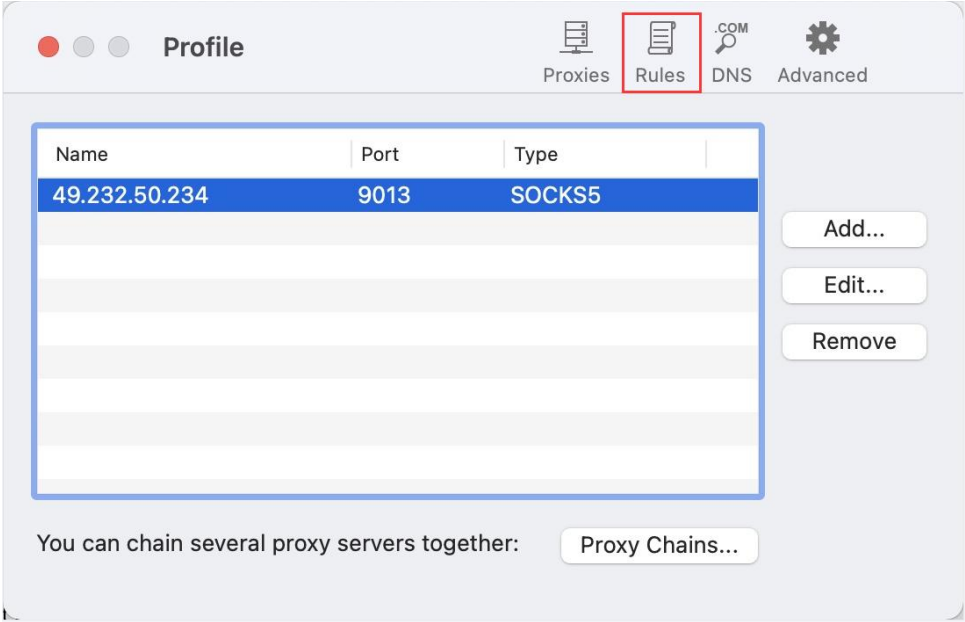

选择 Add...

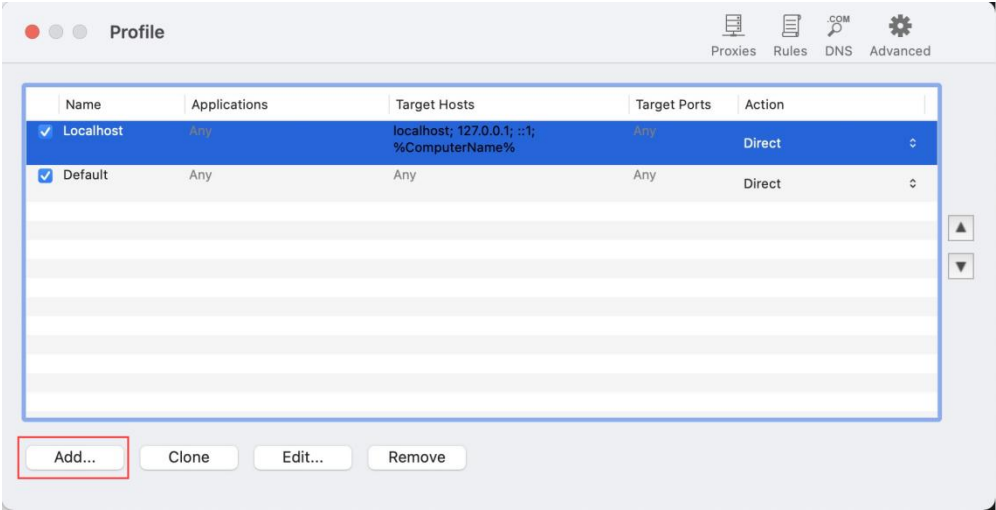

按如下图所示进行填写配置

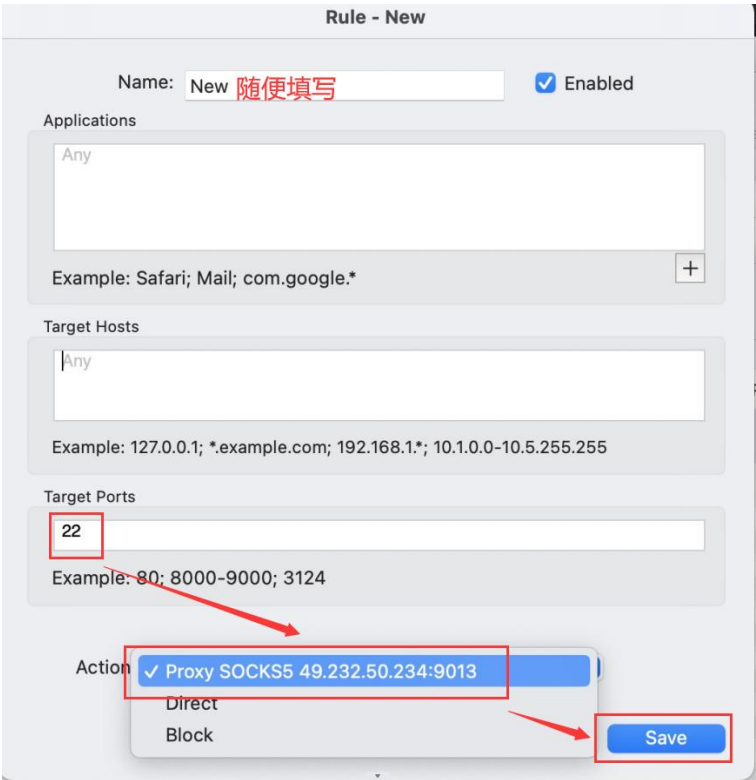

打开你可能用到的应用，验证是否可以连接：

SecureCRT

Xshell

Beyond Compare

vscode

tabby

studio 3t

electerm

MongoDB Compass

Robo 3T

Sequel Pro

redis

transmit

如果客户端连接服务器正常，那么恭喜你；如果无法连接，也不要烦躁灰

心，重头再来《亿》遍或找管理员寻求帮助^_^